

Thyristor Surge Suppressors @10/700 μ S, 2KV

Description

P0080LA - P5000LA Series are designed to protect broadband equipment such as modems, line card, CPE and DSL from damaging over-voltage transients.

The series provides a surface mount solution that enables equipment to comply with global regulatory standards.

Features and Benefits

- u Low voltage overshoot
- u Low on-state voltage
- u Does not degrade surge capability after multiple surge events within limit
- u Fails short circuit when surged in excess of ratings
- u Low Capacitance


Applicable Global Standards

- u TIA-968-A
- u ITU K.20/21 Enhanced level
- u ITU K.20/21 Basic Level
- u GR 1089 Inter building
- u GR 1089 Inter building
- u IEC 6100-4-5
- u YD/T 1082
- u YD/T 993
- u YD/T 950


Electrical Parameters

Parameter	Definition
I_S	Switching Current - maximum current required to switch to on state
I_{DRM}	Leakage Current - maximum peak off-state current measured at V_{DRM}
I_H	Holding Current - minimum current required to maintain on state
I_T	On-state Current - maximum rated continuous on-state current
V_S	Switching Voltage - maximum voltage prior to switching to on state
V_{DRM}	Peak Off-state Voltage - maximum voltage that can be applied while maintaining off state
V_T	On-state Voltage - maximum voltage measured at rated on-state current
C_0	Off-state Capacitance - typical capacitance measured in off state

DO-41

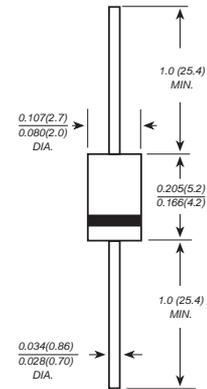

Dimensions in inches and (millimeters)

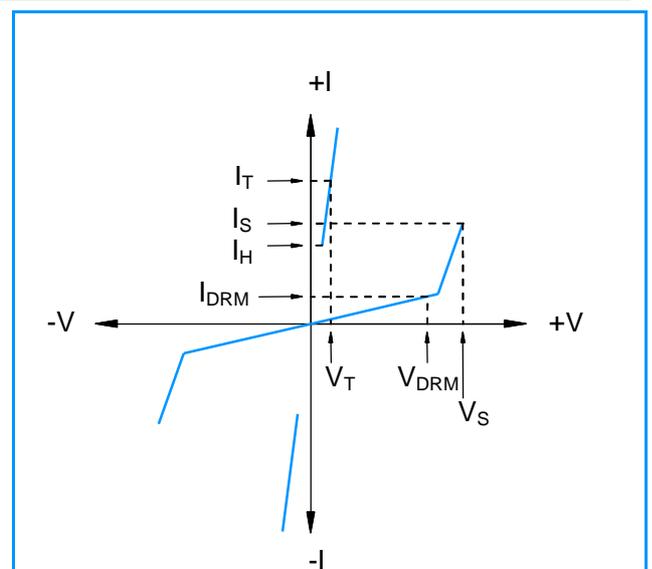

Thyristor Surge Suppressors (TSS)

P0080LA - P5000LA Series - DO-41 @10/700 μ S , 2KV

Electrical Characteristics

Part Number	Marking	V_{DRM} @ $I_{DRM}=5\mu A$	V_S @100V/ μS	V_T @ $I_T=2.2A$	I_S	I_T	I_H	C_0 @1MHz	
		V min	V max	V max	mA max	A max	mA min	pF min	pF max
P0080LA	P008LA	6	25	4	800	2.2	50	25	150
P0300LA	P03LA	25	40	4	800	2.2	50	15	140
P0640LA	P06LA	58	77	4	800	2.2	150	40	60
P0720LA	P07LA	65	88	4	800	2.2	150	35	60
P0900LA	P09LA	75	98	4	800	2.2	150	25	55
P1100LA	P11LA	90	130	4	800	2.2	150	30	50
P1300LA	P13LA	120	160	4	800	2.2	150	25	45
P1500LA	P15LA	140	180	4	800	2.2	150	25	40
P1800LA	P18LA	170	220	4	800	2.2	150	25	35
P2000LA	P20LA	180	220	4	800	2.2	150	20	35
P2300LA	P23LA	190	260	4	800	2.2	150	25	35
P2600LA	P26LA	220	300	4	800	2.2	150	20	35
P3100LA	P31LA	275	350	4	800	2.2	150	20	35
P3500LA	P35LA	320	400	4	800	2.2	150	20	35
P4000LA	P40LA	360	460	4	800	2.2	150	20	35
P4500LA	P45LA	400	540	4	800	2.2	150	20	35
P5000LA	P50LA	440	600	4	800	2.2	150	20	35

Notes:

- Absolute maximum ratings measured at $T_A=25^\circ C$ (unless otherwise noted).
- Devices are bi-directional.

Surge Ratings

Series	2/10 μS^1	8/20 μS^1	10/160 μS^1	10/560 μS^1	10/1000 μS^1	5/310 μS^1	I_{TSM} 50/60 Hz	di/dt
	2/10 μS^2	1.2/50 μS^2	10/160 μS^2	10/560 μS^2	10/1000 μS^2	10/700 μS^2		
	A min	A min	A min	A min	A min	A min	A min	Amps/ μs max
A	150	150	90	50	45	50	20	500

Notes:

- Current waveform in μs
 - Voltage waveform in μs
- Peak pulse current rating (I_{PP}) is repetitive and guaranteed for the life of the product.
 - I_{PP} ratings applicable over temperature range of $-40^\circ C$ to $+85^\circ C$
 - The device must initially be in thermal equilibrium with $-40^\circ C < T_J < +150^\circ C$

Thermal Considerations

Package	Symbol	Parameter	Value	Unit
DO-41 	T_J	Operating Junction Temperature Range	- 40 to + 150	$^\circ C$
	T_S	Storage Temperature Range	- 40 to +150	$^\circ C$
	$R_{\theta JA}$	Thermal Resistance: Junction to Ambient	90	$^\circ C/W$

Thyristor Surge Suppressors (TSS)

P0080LA - P5000LA Series - DO-41 @10/700 μ S , 2KV

Characteristic Curves

Figure 1 - V-I Characteristics

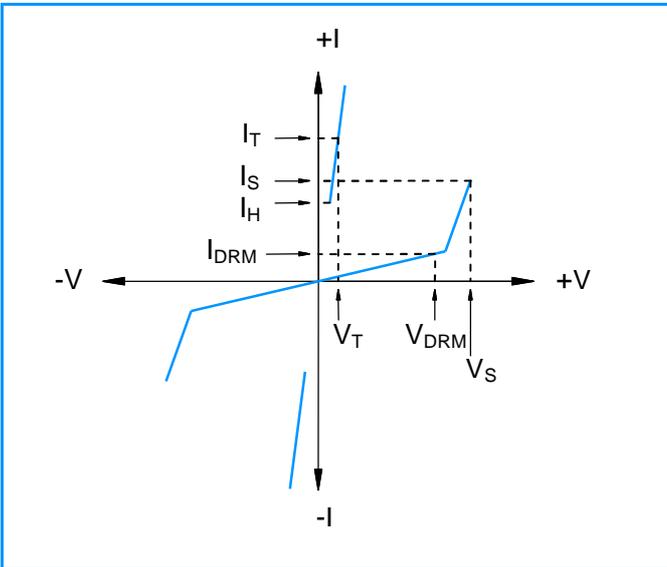


Figure 2 - $t_r \times t_d$ Pulse Waveform

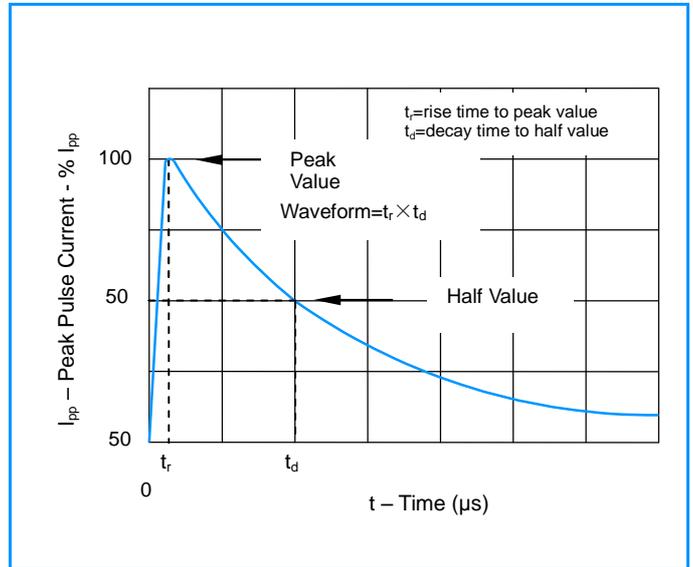


Figure 3 - Normalized V_s Change Versus Junction Temperature

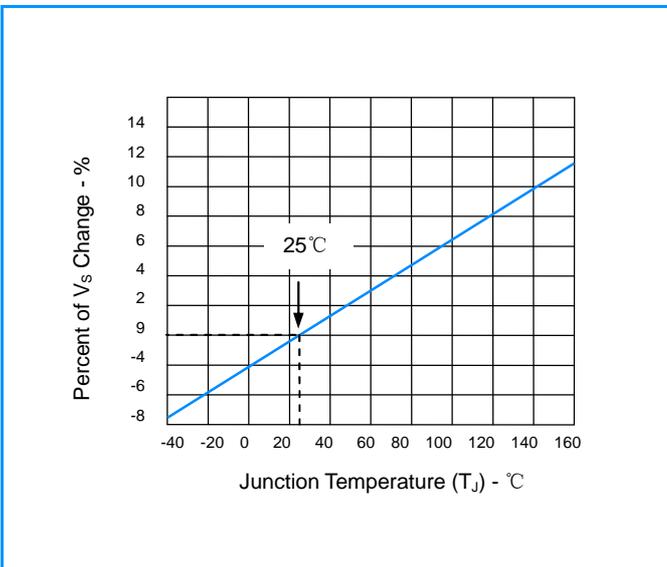


Figure 4 - Normalized DC Holding Current Versus Case Temperature

